

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number
WO 2005/025259 A1

(51) International Patent Classification⁷: **H04Q 7/38**
(21) International Application Number:
PCT/EP2003/009816

(22) International Filing Date:
4 September 2003 (04.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET LM ERICSSON (publ)**
[SE/SE]; S-164 83 Stockholm (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANTTALAINEN, Santeri** [FI/FI]; Kehruutie 1 B 17, FIN-00410 Helsinki (FI). **BALLA, Laszlo** [HU/HU]; Tas u. 24, H-2013 Pomaz (HU). **GYÖRGY, Arpad** [HU/HU]; Wesselenyi street 5, H-1201 Budapest (HU).


(74) Agents: **HOFFMANN EITLE** et al.; Arabellastrasse 4, 81925 München (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF CONTROLLING A COMMUNICATION CONTROL ENTITY

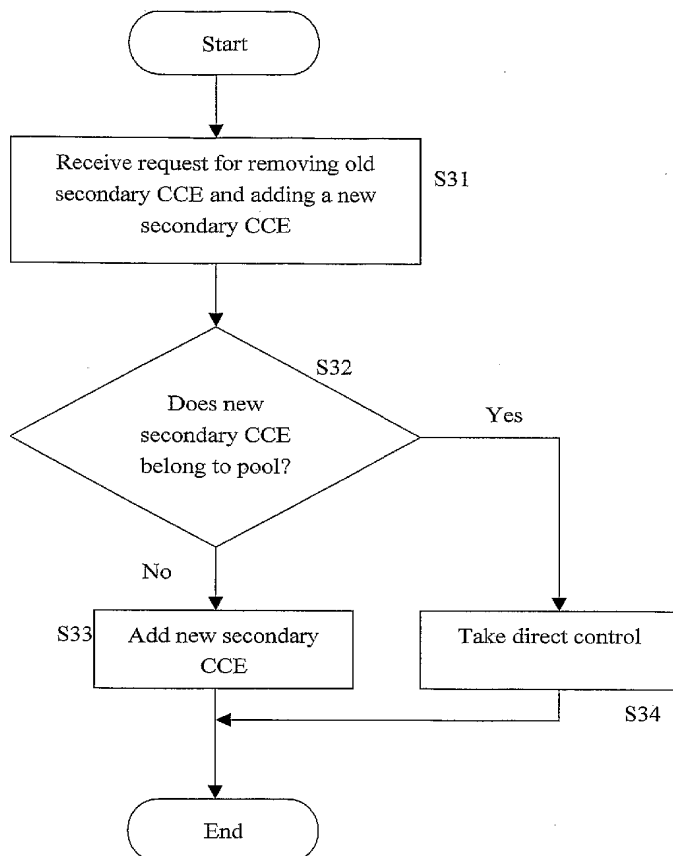

(57) Abstract: A method of controlling a communication control entity in a mobile communication network and a corresponding communication control entity are described. The communication control entity is a part of a pool of communication control entities. In accordance of the invention, when acting as a primary communication control entity and receiving a request for adding a new secondary communication control entity to the overall control procedure, the communication control entity of the invention is arranged to determine whether the requested new secondary communication control entity is a part of the pool or not. If it is a part of the pool, then the primary communication control entity established a direct connection to the access part. The requested communication control entity is not added to the control procedure as a relay.

WO 2005/025259 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

[Title]

Method of controlling a communication control entity

5 [Field of the invention]

The present application is directed towards a method of controlling a communication control entity and to a corresponding communication control entity that is a part of
10 a pool of communication control entities in a mobile communication network. The pool of communication control entities is associated with a group of access control entities, where each communication control entity of the pool can communicate with each access control entity of the group.

15

[Background of the invention]

In the field of mobile communications, it is known to provide a network architecture that is schematically shown in Fig.
20 1a. A mobile communication network may be divided into a communication control part 1 and an access part 2. The communication control part 1 is arranged to manage call communications to and from mobile communication devices, such as the schematically indicated mobile telephone 3. The access
25 part 2 is arranged to manage the access of mobile communication devices to the communication control part 1. As an example, in mobile communication networks operating according to the global system of mobile communication (GSM), the communication control part 1 is referred to as the
30 network and switching sub-system (NSS), and the access part 2 is referred to as the base station sub-system (BSS). Generally, the access part 2 may also be called an access network, and the communication control part 1 may be called a control network.

35

The communication control part 1 comprises a plurality of communication control entities, which are referred to as 121-125 in Fig. 1a. Furthermore, the access part 2 comprises a

plurality of access control entities referred to as 111-118. Each access control entity 111-118 is respectively associated with a service realm 101-108. A service realm is a physical and/or logical area in which service is provided to mobile communication devices. As such, a service realm can be a location area (LA), a cell, a routing area (RA) or anything similar. As an example, in a GSM network, the network control entities 121-125 can be mobile switching centers (MSC), and the access control entities 111-118 can be base station controllers (BSC). In the context of a mobile communication network e.g. operating in accordance with the general packet radio service (GPRS), the communication control entities 121-125 can be GPRS service nodes (GSN) and the access control entities 111-118 can be radio network controllers (RNC).

It may be remarked that the term "entity" as used in the present specification and claims describes a logical unit for fulfilling a given function, where said logical unit may be present in a single physical unit (such as a network server) or spread out over several physical locations, and may consist of hardware, software or any suitable combination of hardware and software.

In the general architecture shown in Fig. 1a, each of the access control entities 111-118 is connected to one or more communication control entities 121-125. Thereby, each communication control entity 121-125 is enabled to communicate with mobile communication devices in the service realm of a connected access control entity 111-118.

In the example of Fig. 1a, the mobile telephone 3 is in service realm 101, which belongs to access control entity 111, which in turn is connected e.g. with communication control entity 121 via connection 130. In this way, the access control entity 111 lets the mobile telephone 3 access the communication control part 1, more specifically the communication control entity 121, which in turn can fulfil its functions of controlling the establishment, maintenance

and termination of communications originating at the mobile telephone 3 and/or directed towards the mobile telephone 3.

It is furthermore known to arrange a mobile communication
5 network of the type shown in Fig. 1a in such a way that the communication control part 1 is arranged to perform a control process such that during the duration of a call communication to a given mobile communication device, one primary
10 communication control entity stays in control of said call communication and communicates with a mobile communication device of which a call communication is being controlled either via an access control entity connected to the primary communication control entity, or via a secondary
15 communication control entity and an access control entity connected to the secondary communication control entity. In this way the secondary communication control entity acts as a relay between the mobile communication device being controlled and the primary communication control.

20 This will briefly be explained by comparing Figs. 1a and 1b. In Fig. 1a, a situation is assumed in which the call communication by mobile telephone 3 is being controlled by communication control entity 121. Communication control
25 entity 121 acts as a primary communication control entity. As an example, the system can be arranged in such a way that the first communication control entity that handles the establishment of a call communication from or to a mobile communication device is selected as the primary communication control entity for the entire duration of the call
30 communication being established. Naturally, other methods of selecting a primary communication control entity are possible.

Fig. 1b shows an example where mobile telephone 3 has moved
35 to service realm 106, which is associated with access control entity 116. Access control entity 116 is connected to communication control entity 124 via a connection 131 provided by the control part 1. However, due to the fact that

communication control entity 121 is the primary communication control entity, it still performs the call control, and uses communication control entity 124 as a relay to the mobile communication device in service realm 106. A control

5 mechanism of this type is e.g. known from GSM, in which case the primary communication control entity 121 is referred to as an anchor MSC, and the secondary communication control entity 124 is referred to as a relay MSC.

10 In order to allow for the mobility of mobile communication devices between different service realms, the communication control part 1 is arranged to be able to conduct a so-called handover procedure between different communication control entities. During an ongoing call communication, the primary
15 call control entity (121 in the above-mentioned example) also controls the handover from one secondary communication control entity to another.

For example, if the mobile telephone 3 shown in Fig. 1b moves
20 from service realm 106 towards service realm 107, a given handover triggering process will be started once it is determined that service should be provided by service realm 107 in place of service realm 106. In this event, a request will be sent to the primary communication control entity 121
25 from the secondary communication control entity 124 or the corresponding mobile communication device in service realm 106, where said request identifies the new communication control entity 125 as a destination. Subsequently, the primary communication control entity 121 establishes a
30 communication with the new secondary communication control entity 125, in order to then use this new secondary communication control entity as a relay towards the communication device in service realm 107.

35 It is furthermore known to arrange a communication network having the architecture shown in Fig. 1a and 1b in such a way that certain access control entities are grouped together, and certain communication control entities are pooled

together, where the group of access control entities and the pool of communication control entities are associated in such a way that each communication control entity in the pool can communicate with each access control entity in the group.

5 This is shown in Figs. 1a and 1b, where reference numeral 12 refers to a pool of communication control entities 121-123, and reference numeral 11 refers to a group of access control entities 111-115. As indicated in Figs. 1a and 1b, a connection mechanism 130 is provided, such that each of the
10 communication control entities 121-123 of pool 12 can communicate with each access control entity 111-115 of group 11. The purpose of such pools and groups is to allow that as long as a mobile communication device moves among the service realms 101-105 associated with the access control entities
15 111-115 of group 11, no handover procedure is conducted between any of the communication control entities of the pool 12. Such pools and groups are e.g. known in the control of service realms having a high traffic load but small physical extension, such as micro-cells in metropolitan areas.

20 [Object of the invention]

It is the object of the invention to provide an improved method of controlling a communication control entity, and an
25 improved communication control entity for a mobile communication network having the above-described architecture.

[Summary of the invention]

30 This object is solved by the subject-matter of claims 1, 4 and 5. Advantageous embodiments are described in the dependent claims.

35 In accordance with an embodiment, a method of controlling a communication control entity in a communication control part of a mobile communication network that comprises said communication control part and an access part is provided.

The communication control part is arranged to manage call communications from and to mobile communication devices and the access part is arranged to manage the access of the mobile communication devices to the communication control part. The communication control part comprises a plurality of communication control entities and the access part comprises a plurality of access control entities. Each access control entity may be associated with a service realm in which it can provide access for a mobile communication device that is within this service realm. Each access control entity is connected to one or more communication control entities for enabling each connected communication control entity to communicate with a mobile communication device in the service realm of the access control entity. The communication control part is arranged to perform a control process such that during the duration of a call communication of a mobile communication device, one primary communication control entity stays in control of the call communication, and communicates with a mobile communication device of which a call communication is being controlled, either via an access control entity connected to the primary communication control entity or via a secondary communication control entity and an access control entity connected to the secondary communication control entity. The secondary communication control entity acts as a relay between the mobile communication device and the primary communication control entity. The communication control part is furthermore arranged to be able to conduct a handover procedure between different of communication control entities for handling situations in which a moving mobile communication device moves from one service realm to another during an ongoing call communication of a moving mobile communication device by adding or removing secondary communication control entities from the control process of an ongoing call communication. The handover from one secondary communication control entity to another is controlled by the primary communication control entity. The mobile communication network is furthermore arranged such that a predetermined number of access control

entities form a group, each access control entity of said group being connected to a plurality of communication control entities that form a pool. Thereby, as long as a given mobile communication device moves among service realms associated with the access control entities of the group, no handover procedure is conducted between any communication control entities of the pool.

In the method of the invention, the communication control entity acts as primary communication entity for a call communication. When receiving a handover request for removing a first secondary communication control entity from the control process and adding a second secondary communication control entity, the primary communication control entity determines whether the second secondary communication control entity belongs to the pool, and if the second secondary communication control entity belongs to the pool (12), the requested second secondary communication control entity is not added to the control procedure, i.e. the request for adding it is rejected. Instead, the primary communication control entity communicates with the mobile communication device of which the given call communication is being controlled via an access control entity connected to the primary communication control entity.

In accordance with another embodiment, a communication control entity for a communication control part of a mobile communication network that comprises said communication control part and an access part is provided. The communication control entity comprises a processor, which, when the communication control entity is acting as a primary communication control entity and when a handover request for removing a first secondary communication control entity from the control process and adding a second secondary communication control entity is received, is arranged to determine whether the second secondary communication control entity belongs to said pool or not. If the requested second secondary communication control entity belongs to the pool,

the processor controls the communication control entity to directly communicate with the mobile communication device of which said given call communication is being controlled via an access control entity connected to said communication control entity. The processor can e.g. be arranged to provide these capabilities by appropriate software elements, i.e. a software element for determining whether the second secondary communication control entity belongs to said pool or not, and a software element for controlling the communication control entity to directly communicate with the mobile communication device when the second secondary communication control entity belongs to the pool.

Therefore, in accordance with the present invention, a communication control entity that belongs to a pool, such as the pool 12 in Fig. 1, and which acts as a primary (or anchor) communication entity for a given call communication, is arranged to perform a determination step when receiving a request for removing a first secondary (or relay) communication control entity from the control process and adding a second secondary (or relay) communication control entity to the process, i.e. when requested to conduct a handover from a first to a second secondary communication control entity. If the second secondary communication control entity belongs to the pool, then this desired second secondary communication control is not added to the control procedure, much rather the primary communication control entity takes control by communicating with the mobile communication device of which the call communication is being controlled, directly via an access control entity connected to the primary communication control entity.

[Brief description of Figures]

Fig.1a shows a schematic representation of a network architecture to which the present invention can be applied, where a mobile communication device is in a first service realm,

Fig.1b shows a schematic representation of the network architecture of Fig. 1a, where the mobile communication device is in a second service realm, and

Fig. 2 shows a flow chart of a basic embodiment of the invention.

[Detailed description of embodiments]

An embodiment of the present invention will now be described with reference to the flow chart of Fig. 3 and the entities already described in connection with Figs. 1a and 1b. As already mentioned in connection with Figs. 1a and 1b, the described entities can operate in accordance with GSM, GPRS or any other telecommunication standard such as e.g. UMTS (Universal Mobile Telephony System). The various communication control entities 121-124 can be of the same type (e.g. can all be MSCs of a GSM system), or can be of different type, e.g. some can be GSM MSCs and others can be GPRS SGNs or the corresponding UMTS entities.

Naturally, the number of elements shown in Fig. 1a and 1b is only an example, and the present invention can be applied to mobile communication networks having a larger or smaller number of communication control entities and access control entities.

In accordance with the invention, one or more of the communication control entities 121-123 contained in pool 12 is arranged to operate as shown in Fig. 2. More specifically, the communication control entities are arranged to operate in accordance with the method of Fig. 2 when acting as a primary communication control entity, e.g. when acting as an anchor MSC.

Reference will now also be made to Fig. 1b, where it is assumed that entity 121 is the primary communication control entity and entity 124 the secondary communication control entity. Consequently, entity 121 communicates with entity 124 via an appropriate connection 131 (provided by the communication control part 1). If the mobile telephone 3, which is an example of a mobile communication device, moves out of service realm 106, then an appropriate handover request will be sent to entity 121 via entity 124. In this request, the secondary communication control entity 124 will indicate a new communication control entity that is to be involved as a secondary communication control entity. Step S31 in Fig. 2 indicates the receipt of such a request by the primary call control entity 121.

Subsequent to step S31, the present invention proposes to implement a decision step S32, in which the primary communication control entity determines whether the new secondary call control entity identified in the request belongs to pool 12 or not. If it does not belong to the pool, then the procedure goes to step S33, in which the requested new secondary call control entity is employed in place of the old one making the request. For example, if secondary call control entity 124 requests a handover to call control entity 125, then the primary call control entity 121 determines in step S32 that call control entity 125 is not a member of pool 12, and consequently performs the regular handoff procedure in order to use new secondary communication control entity 125 and to subsequently release old call communication control entity 124.

On the other hand, if step S32 determines that the requested new secondary call control entity is a member of pool 12, then the primary communication control entity 121 does not switch to the requested new secondary call control entity, but much rather takes direct control, as indicated in step S34. This means that the primary communication control entity

directly communicates with the access part 2, without using another communication control entity as a relay.

For example, it is possible that when the mobile telephone 3 moves into service realm 105, the secondary call control entity 124 will identify service realm 105 as associated with communication control entity 123. Being outside of pool 12, communication control entity 124 will not be aware of this pool 12. The information providing an association between the service realm 105 and communication control entity 123 can be derived e.g. from general network information available to communication control entity 124.

Therefore, the secondary communication control 124 sends a handover request to primary communication control entity 121, said request identifying call control entity 123 as a desired new secondary communication entity. In accordance with the method of the invention, the determination of step S32 will let primary communication control entity 121 determine that the desired new secondary communication control entity 123 is a member of pool 12. As a consequence, the primary communication control entity 121 will not add entity 123 to the control procedure, but much rather directly establish communication with the access control entity 115 that is associated with the service realm 105 into which the mobile telephone 3 has moved. Thereby, the concept of the present invention avoids an unnecessary handoff procedure in the pool 12, which reduces overall traffic in the network and thereby decreases the network load.

The determination of step S32 can be done in any suitable or desirable way. For example, each member of pool 12 can be arranged to keep a list of identifiers of communication control entities belonging to the pool 12. Alternatively or in addition, each communication control entity can also keep a list of identifiers of access control entities/service realms belonging to the group 11 associated with the pool 12. In this way, each communication control entity 121-123 of

pool 12, when acting as a primary communication control entity, can determine whether a request identifies a communication control entity of pool 12 directly (in terms of an identifier for call control entities) or indirectly (in terms of an identifier for access control entities/service realms).

The method of the present invention can also be embodied in the form of a computer program product (e.g. a computer program or a data carrier storing such a computer program) for performing the method of Fig. 2 when executed on a communication control entity such as entity 121 described above.

The present invention can furthermore be embodied by a device acting as a communication control entity, where such a device is arranged to perform the method of Fig. 2, which can be accomplished by designated hardware, software or any suitable combination of hardware and software. Preferably, this is achieved by running software that implements the method of the invention on a network node of the mobile communication network.

Although the previous description refers to specific embodiments, these only serve to provide a thorough understanding of the invention, and the scope of the invention is defined by the appended claims. Reference numerals in the claims serve to make the claims easier to read, but are not intended to be limiting.

Claims

1. A method of controlling a communication control entity
(121, 122, 123) in a communication control part (1) of a
5 mobile communication network that comprises said
communication control part (1) and an access part (2),
said communication control entity (121, 122, 123) acting
as a primary communication entity (121) for a call
communication and belonging to a pool (12) of
10 communication control entities among which no handover
procedure is conducted as long as a mobile communication
device (3) moves among service realms (101, 102, 103,
104, 105) associated with a predetermined number (11) of
access control entities (111, 112, 113, 114, 115) that
15 are connected to said pool (12), said method comprising
the steps:

receiving (S31) a handover request for removing a first
secondary communication control entity (124) from a
20 control process for controlling said call communication
and adding a second secondary communication control
entity (123, 125),

determining (S32) whether said second secondary
25 communication control entity (123, 125) belongs to said
pool (12), and if said second secondary communication
control entity (123) belongs to said pool (12),
rejecting to add said second secondary communication
control entity (123) to said control procedure and
30 instead communicating (S34) with the mobile
communication device (3) of which said given call
communication is being controlled via an access control
entity (111) connected to said primary communication
control entity (121).

35 2. The method of claim 1, wherein said primary
communication control entity (121) determines whether
said second secondary communication control entity (123,

125) belongs to said pool (12) by determining an identifier of said second secondary communication control entity (123, 125) from said handover request and comparing said identifier with a list of identifiers of communication control entities belonging to said pool (12).

3. The method of claim 1, wherein said primary communication control entity (121) determines whether said second secondary communication control entity (123, 125) belongs to said pool (12) by determining an identifier of an access control entity (104, 105; 107, 108) connected to said second secondary communication control entity (123, 125) from said handover request and comparing said identifier with a list of identifiers of access control entities belonging to said predetermined number (11) of access control entities (111, 112, 113, 114, 115).

4. A computer program product for performing the method of one of claims 1 to 3 when executed on a communication control entity (121, 122, 123, 124, 125) of said mobile communication network.

5. A communication control entity (121) for a communication control part (1) of a mobile communication network that comprises said communication control part (1) and an access part (2), said communication control entity (121) belonging to a pool (12) of communication control entities among which no handover procedure is conducted as long as a mobile communication device (3) moves among service realms (101, 102, 103, 104, 105) associated with a predetermined number (11) of access control entities (111, 112, 113, 114, 115) that are connected to said pool (12), and being arranged to act as a primary communication entity (121) for a given call communication, wherein said communication control entity (121) comprises a processor, which, when said

communication control entity (121) is acting as a
primary communication control entity (121) and when a
handover request for removing a first secondary
communication control entity (124) from the control
process and adding a second secondary communication
control entity (123, 125) is received, is arranged to
determine whether said second secondary communication
control entity (123, 125) belongs to said pool (12), and
if said second secondary communication control entity
(123) belongs to said pool (12), controlling said
communication control entity (121) to directly
communicate with the mobile communication device (3) of
which said given call communication is being controlled
via an access control entity (111) connected to said
communication control entity (121).

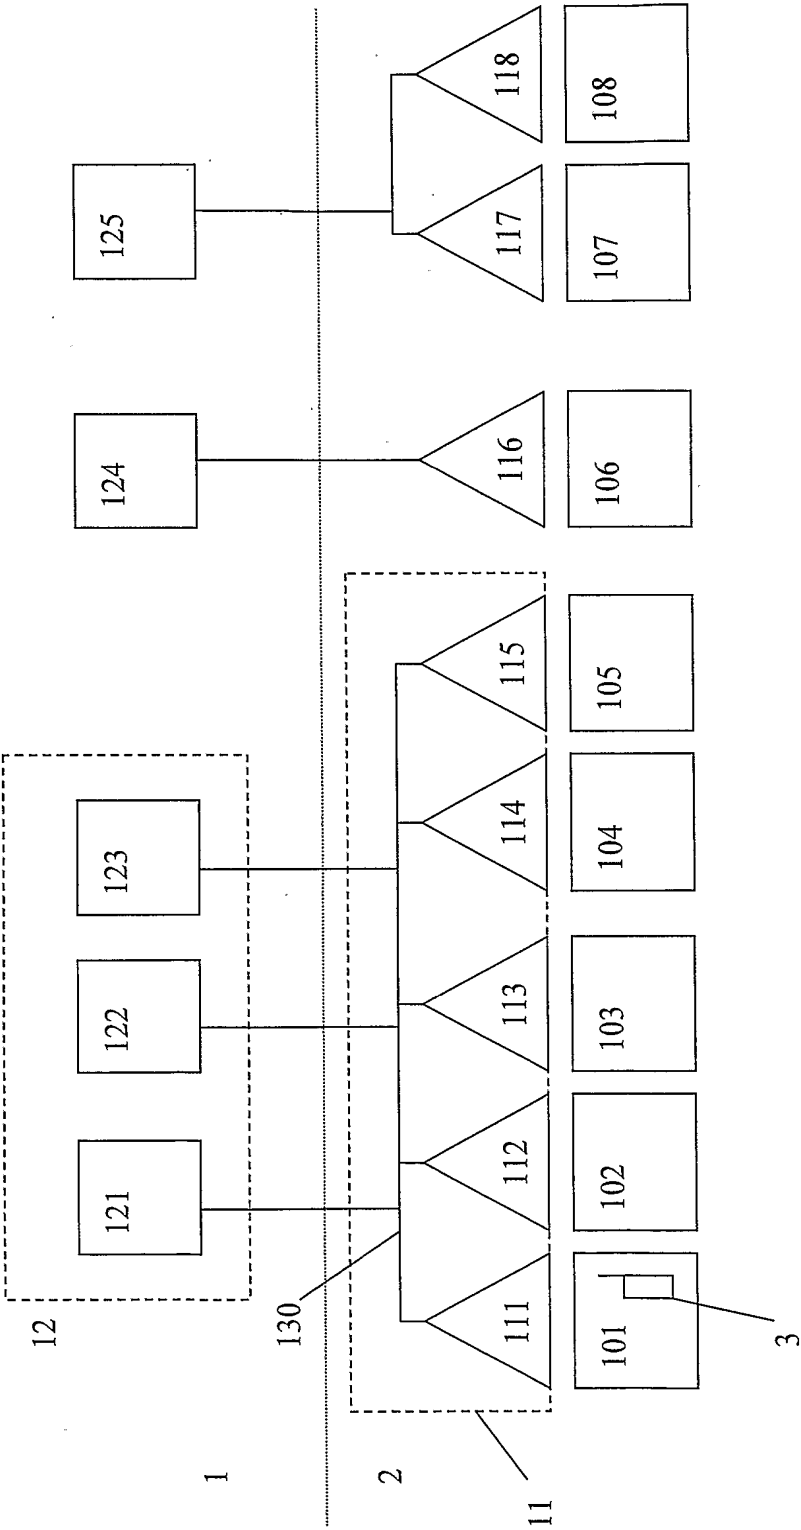


Fig. 1a

2/3

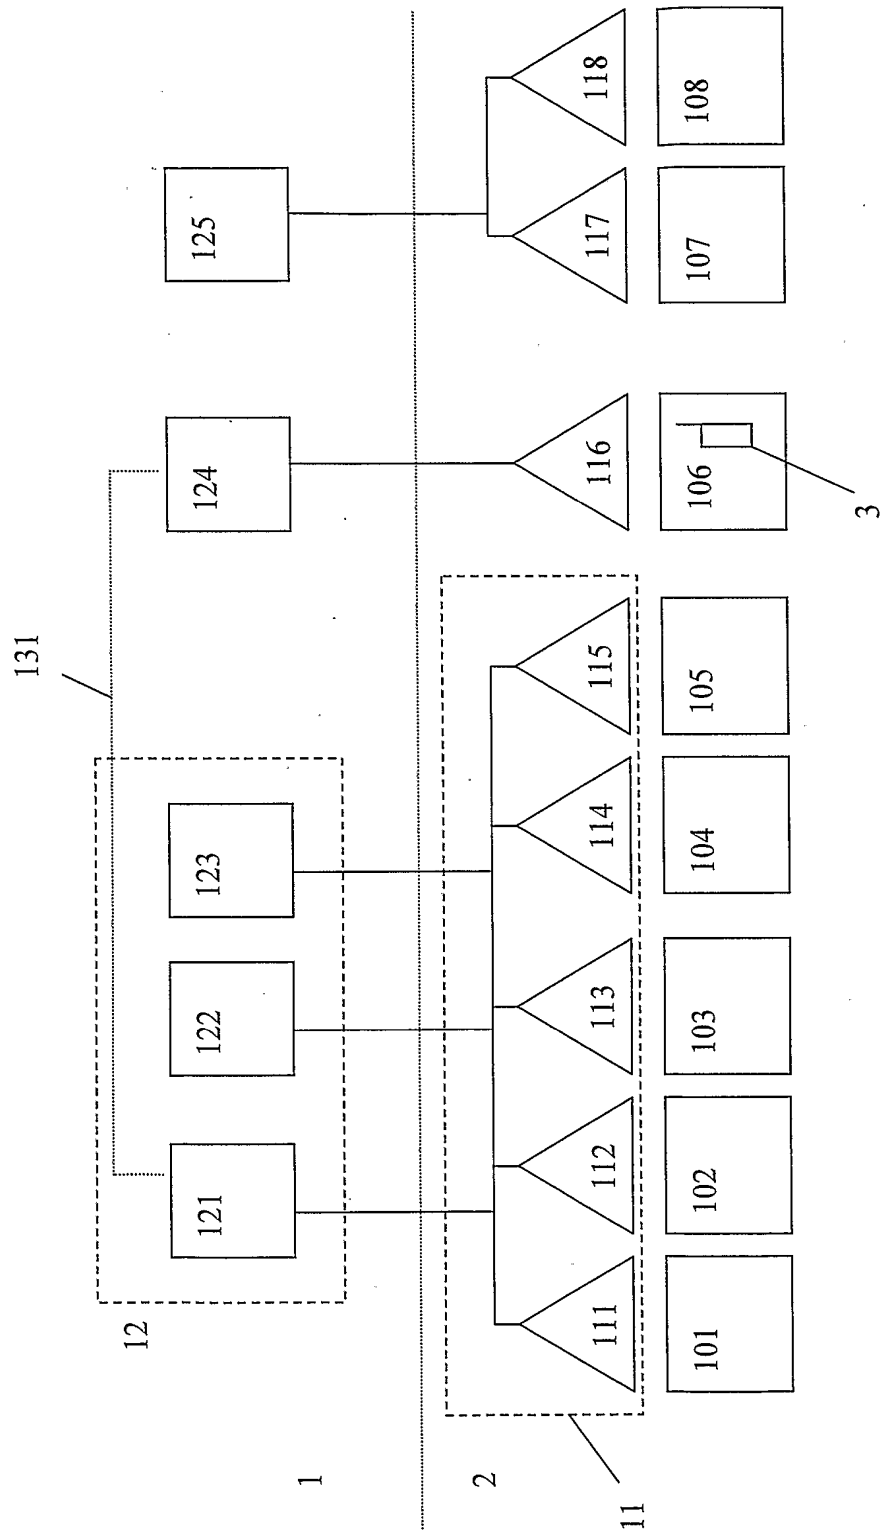
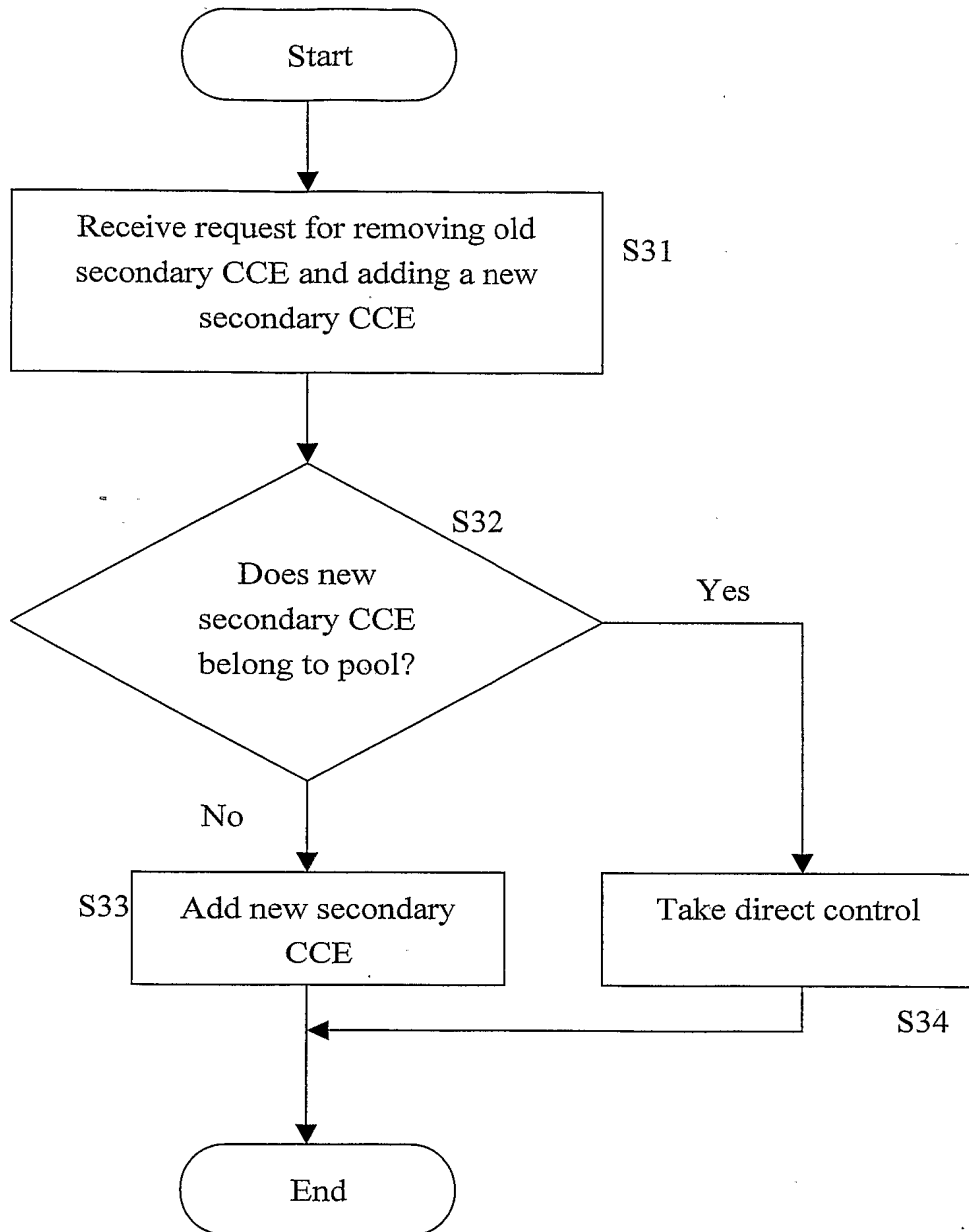


Fig. 1b

3/3

**Fig. 2**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/09816

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/35879 A (LAIHO KEIJO ;TOIVANEN KYOESTI (FI); ERICSSON TELEFON AB L M (SE);) 2 May 2002 (2002-05-02) page 2, line 9 -page 3, line 33 page 9, line 13-19 page 9, line 34 -page 10, line 26 page 10, line 27 -page 11, line 20 page 11, line 21-31 page 12, line 3-25	1-5
A	US 6 097 951 A (REECE CHRISTOPHER S ET AL) 1 August 2000 (2000-08-01) column 2, line 50 -column 3, line 10 column 3, line 63 -column 4, line 11 column 5, line 65 -column 6, line 6 column 8, line 49-61 column 10, line 18-58	1-5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

13 May 2004

Date of mailing of the international search report

26/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mele, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/09816

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 0235879	A	02-05-2002	AU	9253101 A	06-05-2002
			WO	0235879 A1	02-05-2002
US 6097951	A	01-08-2000	AU	8823598 A	01-03-1999
			BR	9810976 A	08-08-2000
			CA	2301180 A1	18-02-1999
			CN	1290459 T	04-04-2001
			EP	1013114 A2	28-06-2000
			JP	2003521819 T	15-07-2003
			WO	9908392 A2	18-02-1999
			US	6148201 A	14-11-2000
			US	6091953 A	18-07-2000
			US	6553227 B1	22-04-2003